





2F BLG1, Xintaiyang Industrial Park, NO. 114 Zhulongtian Road, Shiyan Street, Baoan District, Shenzhen, China

- \$\left\$ +86 755 29191985
- 🖻 +86 755 29191985
- @ overseas@arechtech.com
- https://arechtech.com
- https://arechtech-led-display.eu



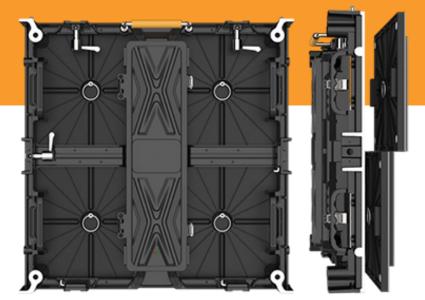

ARECH






ARECH LED Screen: Rental & Staging Series make your next event unforgettable, use our high resolution and high-quality LED Display!

(Indoor & Outdoor)

ARECH produces LED Screen for any application: TV studios, scenography, sports, and entertainment, trade shows, conferences, fashion shows, temporary shops

LED Display for Rental & Staging is a good solution to give visibility to events, outdoor or indoor, the definition of the LED Screen is directly related to the number of pixels on the screen, it can be high definition like



Pitch 2.6mm, or big Pitch like 5.9mm, and our LED Screen for rental & staging are lightweight, easy to mount, and move around quickly and fast.




Why our Rental & Staging Series LED Display?

- QUICK AND SIMPLE ASSEMBLING
- LIGHTWEIGHT AND EASY TRANSPORTATION
- HIGH DEFINITION VIDEOS AND IMAGES

https://arechtech.com

Your Trusted Manufacturer Partner

DIFFERENT KINDS INSTALLATION OF CABINET



Stack installation



Convex & Concave



Hanging installation

Optional Cabinet size (2 format size)



- 500x500mm optional
- 500x1000mm optional






Other advantage of our LED Display

Fold-over Edge Cover to Protect the LED Lamp

Easy Installation, Single Person Operation & Installation

EASY & FAST

Front & Rear Maintenance / Single Person Operation & Installation









🚯 ARECH

Rental & Staging LED Screen Specification

ACIDP02.5FF	ACIDP02.6RS	ACIDP02.9RS	ACIDP03.9RS	ACODP03.9RS	ACODP04.8RS	ACODP05.9RS
Pixel Pitch	2.6mm	2.9mm	3.9mm	3.9mm	4.8mm	5.9mm
LED Type	SMD2121	SMD2121	SMD2121	SMD1921	SMD1921	SMD2727
Module Dimension WxH	250x250mm					
Cabinet Dimension WxH	500×500/500x1000mm Optional					
Cabinet Material	Aluminum					
Cabinet Weight	8kg/500x500mm					
Service Type	Front					
Brightness	1000-1200nits	1000-1200nits	1000-1200nits	4500-5000nits	4500-5000nits	4500-5000nits
Processing	16 bit					
Colors	281 trillion					
Drive Mode	Dynamic					
Hor. Viewing Angle	160° +/-5° (@50% brightenss)					
Vert. Viewing Angle	160° +/-5° (@50% brightenss)					
Power Consumption	280 W/m²(typ.)					
Refresh Rate	Adjustable					
IP Rating	IP40	IP40	IP40	IP65	IP65	IP65
Operating Power Voltage	100-240V / 50-60Hz					
Operating Temperature	-10°C to +40°C					
Operating Humidity	10% to 90%					
Standard	CE / FCC					
Warranty	2 years					

We assure the quality, that's why we do quantity!





Your Trusted Manufacturer Partner

2F BLG1, Xintaiyang Industrial Park, NO. 114 Zhulongtian Road, Shiyan Street, Baoan District, Shenzhen, China

- \$\left\$ +86 755 29191985
- +86 755 29191985
- @ overseas@arechtech.com
- https://arechtech.com
- https://arechtech-led-display.eu



